

SUPASORB

High Capacity Oil Removal Modules



The removal of trace hydrocarbons from partially processed water prior to discharge can be a challenging and costly exercise. In response to the need for better technology for this application, Amazon Filters has introduced the **SupaSorb** range of cartridges. **SupaSorb** cartridges are so effective that they can absorb up to 300% of their dry weight in oil/hydrocarbon. These modules provide economical removal of up to 99% of oil and emulsions and are ideal for use as a polishing step downstream of existing bulk oil removal technologies. Where the contamination level is < 500 mg/l, efficiency is maintained at high flow rates. Therefore they offer a compact solution for oil removal that reduces the environmental impact of oilfield and process industry operations. **SupaSorb** cartridges are available in the most common standard single and double open-ended formats so can be used in existing filter housings.

Typical Applications

- **Produced Water** - The water released with oil and gas extractions is likely to contain both dissolved and dispersed hydrocarbons. SupaSorb cartridges can be used as an end of pipe solution down stream of the primary oil removal process

- **equipment.** This will remove residual gas condensate and dissolved and dispersed oil from produced water, enabling it to be discharge directly into the sea or to a watercourse.
- **Displacement Water** – Water used in down-hole operations will be contaminated with hydrocarbons when displaced. The use of SupaSorb cartridges will help meet target discharge levels.
- **Rig and Tanker Slop Water** – Installation 'run-off' water produced by operations such as washing and flushing and by rainfall will be contaminated by oil. Run-off water can be treated by SupaSorb cartridges to ensure compliance with over board discharge limits.
- **Well Test Water** – Water extracted during well production testing will contain high levels of hydrocarbons. SupaSorb cartridges can be used as a polishing step downstream of primary treatment to ensure discharge limits are met.
- **Pipeline Purge Water** – SupaSorb cartridges can be used to remove oil from water used to purge pipelines to enable discharge into the environment.



Features and Benefits

- **SupaSorb** absorbs up to 300% of its dry weight of oil/hydrocarbons
- Typically absorbs up to 99% of total hydrocarbons in water
- Proven technology offers effective oil removal at high flow rates thus reducing system size and footprint
- Easy to install and operate with low capital and operational costs
- Modular design allows appropriate sizing for all flow rates
- Compact design means easy disposal of spent cartridges

Engineering Capabilities

Amazon Filters are experts in the design and manufacture of filter housings that meet the critical demands of the Oil and Gas industry. We have extensive experience in the manufacturing of vessels in Duplex (UNS S31803), Super-Duplex (UNS S32750/60) and 316 stainless steels. We also supply carbon steel vessels lined with rubber, vinyl ester or glass flake. Our design team is fully conversant with the increasing technical demands of pressure vessel design codes including ASME VIII, PD5500 and EN13445. All our products meet the demand of ATEX and conform to the latest version of the Pressure Equipment Directive (PED) 97/23/EC.



SupaSorb Technical Data

Dimensions

Outside Diameter: 70mm
117mm (B-Blue)

Materials of Construction



Media: Modified Cellulosics
Core, Net and Connections: Polypropylene

Maximum Operating Conditions

Temperature: Standard Unit: 70°C
High Temperature Unit: 99°C
Recommended Maximum Inlet Contamination Level: 500mg/l

UK Offshore Chemical Notification Scheme

Category: 0 (Zero)

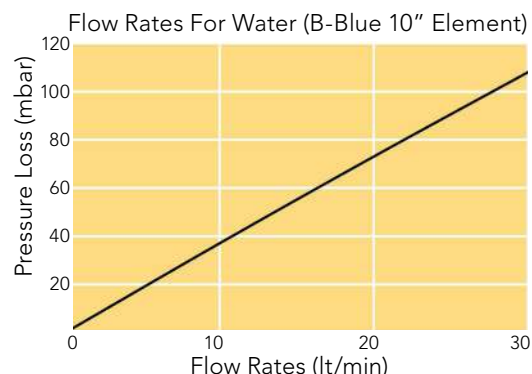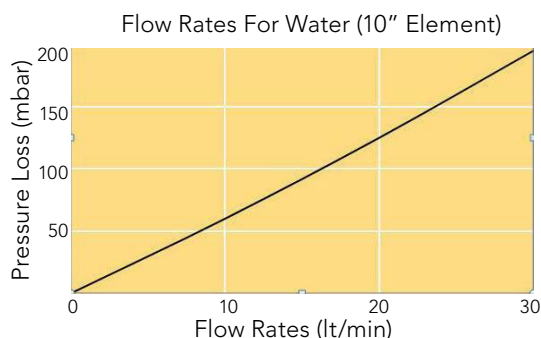

Ordering Guide

13OAS -	20	7	E	P	BB
Media	Length	Connections	Seal	Branding	Options
13OAS - Oil Absorber Standard	09 - 251mm	0 - DOE	B - Buna	P - Plain	BB - B-Blue
13OAH - Oil Absorber High Temperature	20 - 508	2 - Code 2	E - EPDM		
	30 - 762	3 - Code 3	S - Silicone		
	40 - 1016	7 - Code 7	V - Viton		
		8 - Code 8			

Example: 13OAS-207EP = Oil absorber standard, 20" (508mm) long, Code 7 connections with EPDM Seal.

AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD
CAMBERLEY, SURREY, GU16 7PG
ENGLAND

Tel. +44 (0) 1276 670600
Fax. +44 (0) 1276 670101
Email. sales@amazonfilters.co.uk
Web. www.amazonfilters.com