



HSL Filter Housing

- sanitary liquid

- Single element sanitary liquid housing
- Designed specifically for the food and beverage and pharmaceutical industry
- Sanitary vent and tri-clamp connections as standard
- Sanitary tri-clamp body closure as standard



Specification

Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

Surface Finish

- Internal: Polished 0.4 µm Ra
- External: Polished 0.25 µm Ra

All finishes pickled & passivated.

Welding

All assembly welds are full penetration. All welds are crevice and undercut free.

Weld finish & detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	011	012	013
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid / Gas	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	CAT I
Volume (litres)			2.9	4.8	6.7

Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
10" (250 mm)	156	417	313	1.0	1.5	3.8
20" (500 mm)	156	667	561	1.6	1.5	4.8
30" (750 mm)	156	912	809	2.6	1.5	5.7

Dimensions are based on illustration shown (HSLCE011BT-C-S).
For accurate dimensions, please contact Parker dominick hunter.

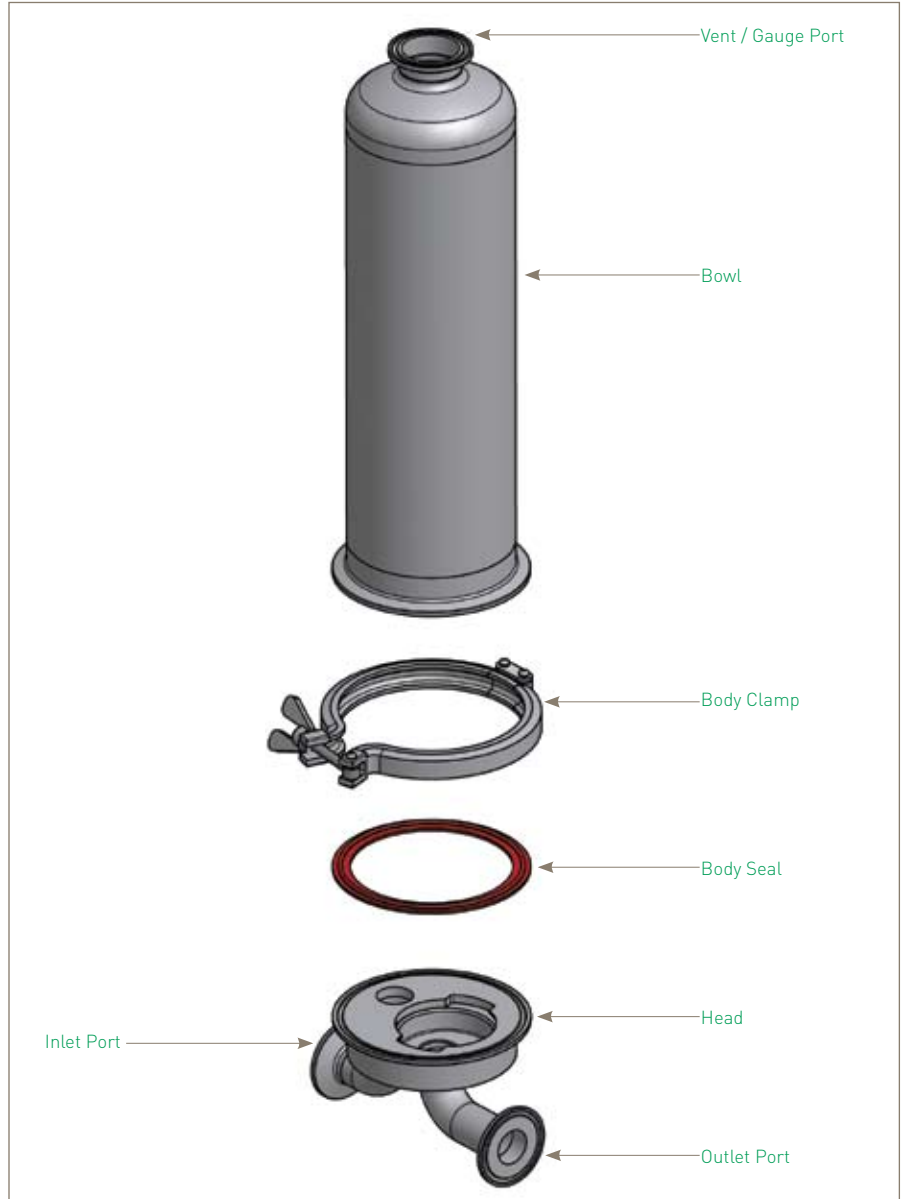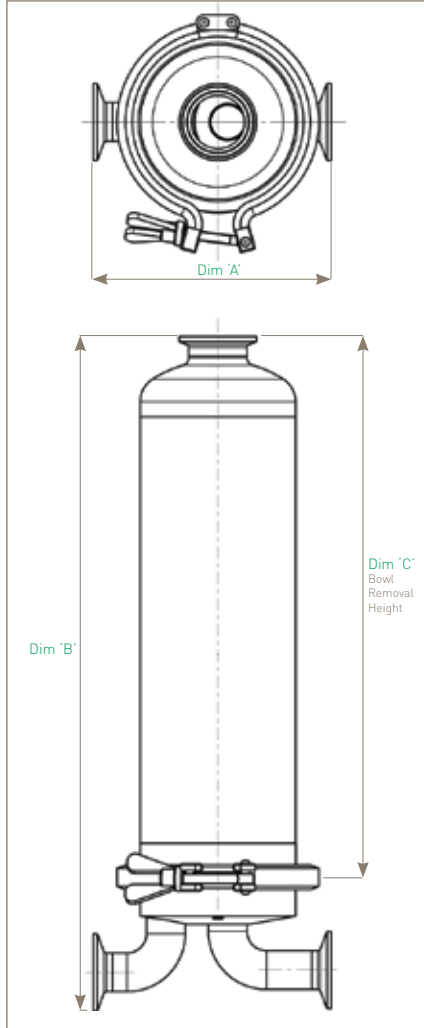

Ordering Information

HSL 01 - -

Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm)	B 1" [25.4 mm]	T Tri-Clamp	C 226	S Silicone

Note: For accessories, i.e. gauges, please contact Parker dominick hunter - Process Division for full availability.

For additional features, Parker dominick hunter offer this housing as part of its Standard PLUS Range.
Please see HSL® datasheet for more information.

Parker dominick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.