

# 72 SERIES IN-LINE

## Hygienic Single Filter Housing



The **72 Series 'In-Line'** single cartridge housing is designed to be hygienic and to be used in the most critical of applications. The 'In-Line' configuration allows the housing to be incorporated easily into process pipelines. It is suitable for the filtration of both liquids and gases at pressures up to 10 bar g and temperatures up to 150°C. The housing is designed to have no loose internal components thus ensuring easy and fast sanitisation and cleaning procedures.

The **72 Series** housing will accept the full range of Amazon Single Open End industry standard cartridges ranging from 0.03 to 40µm with nominal lengths of 10, 20 and 30".

### Product Features

- 'In-line' style construction with a high specification hygienic electropolish finish
- Quick release Vee clamp closure for ease of access
- No loose internals for trouble free operation
- PED and ATEX compliant
- CE Marked



## Features and Benefits

- 'In-Line' configuration allows easy incorporation into process pipelines
- Hygienic sanitary design for most critical applications
- Standard single open end cartridge fitting, using Bayonet lock code 7 for forward and reverse flow
- 316L construction for maximum corrosion resistance
- Every housing is etched with a serial number for full traceability
- Wide range of options available for the connection size and style, cartridge lengths and materials of construction

## Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



# 72 Series In-Line Technical Data

## Maximum Operating Conditions

Pressure Range:	Liquid:	FV / 10 bar g
	Gas Group 1:	FV / 10 bar g - 5" & 20" FV / 7 bar g - 30"
Temperature Range:	Gas Group 2:	FV / 10 bar g
		-10°C / 150°C

## Materials of Construction

Body and Closure:	316L St.Steel
Clamp:	304 St.Steel

## Finish

Vessel:	0.8µm Ra mechanically polish and final electropolish
---------	--

## Connections

Inlet/Outlet:	1½" Tri Clamp
---------------	---------------

Model	Dimensions					Volume (Litres)	Dry Weight (kg)
	A	B	C	D	E		
720117VM15L1PS	418	36	-	-	350	2.5	4.1
720127VM15L1PS	671	36	-	-	350	4.4	5.4
720137VM15L1PS	927	36	-	-	600	6.3	6.6

## PED Status:

Fluid Groups:	Compliant with 2014/68/EU Gas Group 1 + 2 Liquids Group 1 + 2
---------------	---


## Marking:

Exceptions:	CE
-------------	----

## ATEX:

	Compliant with 2014/34/EU, level CE Ex II 2 GD c X
--	--

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

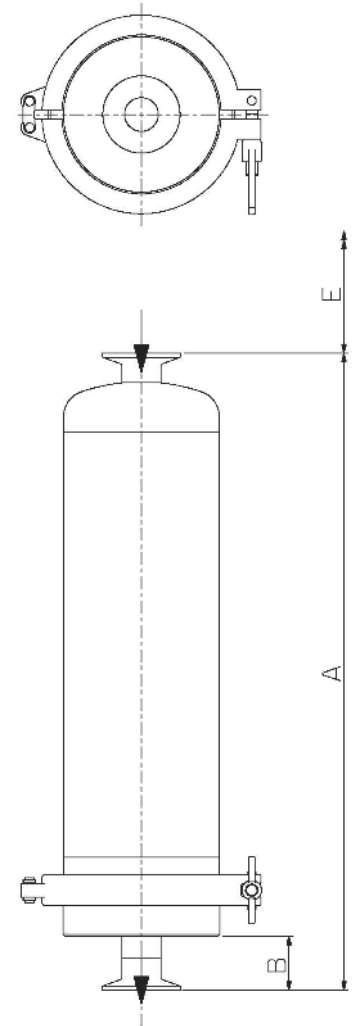

# Ordering Guide

7201	1	7	V	M	15	L	1	P	S
No of Stacks	Cartridge Length	Cartridge End Cap Style	Closure Style	Mounting	Connection	Connection Type	Materials	Finish	Seal
7201 - 1	1 - Single 10" 2 - Double 20" 3 - Triple 30"	7 - Code 7	V - Vee Clamp	M - In Line	10 - 1" 15 - 1 ½" 20 - 2"	L - BS4825-3 Tri Clamp M - DIN11851 N - RJTM P - SMS M (Swedish) R - IDFM	1 - 316 st.st (L Grade)	P - 0.8Ra internal polish + Electropolish U - 0.4 Ra internal polish + Electropolish	S - Silicone V - Viton T - PTFE Envelope E - Ethylene Propylene

Example: 720117VM15L1PS = 72 Series, 1 x 10" Code 7 cartridge, vee clamp closure, In Line mounting, 1½" Tri Clamp connections. St Steel construction with 0.8 Ra finish internally with Electropolished dome.

# AMAZON FILTERS LTD.

Albany Park Estate, Camberley, Surrey, GU16 7PG, ENGLAND

Tel: +44 (0) 1276 670 600 Email: sales@amazonfilters.co.uk Web: www.amazonfilters.com