




Scinor® SMT600-P56

Pressurized Ultrafiltration Module

Scinor SMT600 series ultrafiltration modules utilizing our state-of-the-art Thermally Induced Phase Separation (TIPS) PVDF membranes provide the highest permeability, mechanical strength, and chemical tolerance in the industry. These modules are ideal for use in potable water, wastewater, desalination, and industrial applications. The SMT600-P56 retrofits major membrane vendor installations giving end-users a choice when replacing membranes.

The SMT600-P56 is an outside-in configuration module that operates in dead-end or cross-flow mode depending on specifics of the application. Cleaning processes used are simple backwash, maintenance clean, and Clean-in-Place.

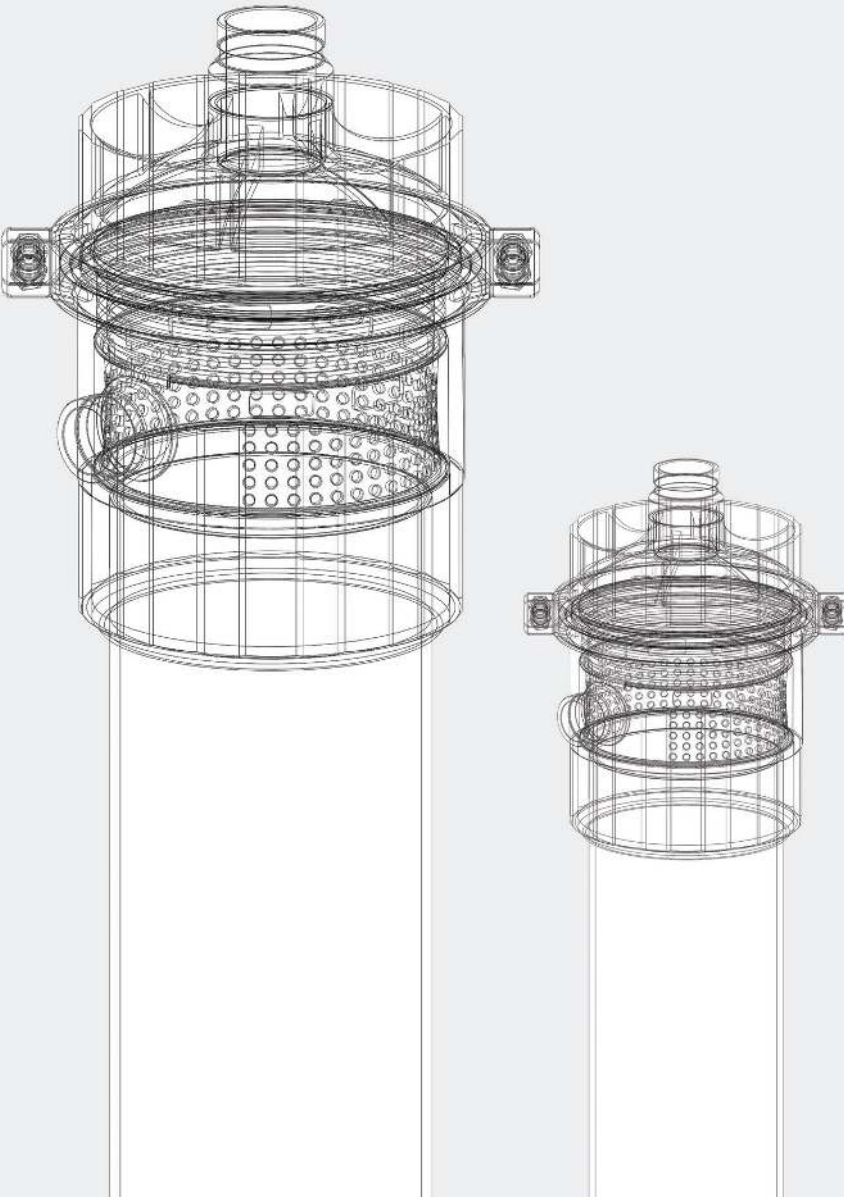

Product Advantages

Excellent Filtered Water Quality

- Tight 0.1 μm pore size distribution
- Low fiber breakage rate

Long Operational Life

- High mechanical strength and durability
- >5000 mg/L Sodium Hypochlorite tolerance

Low Capital Cost

- High flux rates on all water sources

Low Requirements for Pretreatment

- Outside-in configuration
- Optimal flow channel

Low Operating and Maintenance Requirements

- Low energy and chemical consumption due to higher permeability
- Automatic operation

Scinor Water America, LLC

40 Wall Street, 28th Floor
New York, NY 10005
800.774.1385

Please visit scinor.com for further information.



Certified to
NSF/ANSI 61



Retrofit modules available for all major membrane suppliers

Specifications

Parameters

Scinor® Module	Part Number	SMT600-P56
	Fiber Material	Polyvinylidene Fluoride (PVDF)
	Effective Area	603 ft ² (56 m ²)
	Nominal Pore Size	0.1 μm
	Fiber ID/OD	0.7 mm/1.3 mm
	Geometry	Φ 180 mm × 1919 mm
	Port Size	ANSI 2", Side ANSI 1-1/2"
	Housing/Head Material	U-AVC
	Potting Material	Epoxy Resin
Operating Parameters	Temperature	33-104° F (1-40 C)
	pH Range	1-13
	Max. NaClO	5000 mg/L
	Backwash Flux	30-70 gfd (50-120 l/mh)
	Air Scour Flow	3.1-7.5 scfm/module (5-12 Nm ³ /hr/module)
	Max. Feed Pressure	60 psi (0.4 MPa)
	Max. TMP	45 psi (0.3 MPa)
	Operating TMP	3-22 psi (0.02-0.15 MPa)
	Max. Air Scour Pressure	36 psi (0.25 MPa)
	Max. Backwash Pressure	36 psi (0.25 MPa)
	Turbidity	≤0.1 ntu
Filtered Water Performance	Silt Density Index	≤3
	E.Coli Removal	non-detect



Drinking Water



Wastewater



Desalination



Industrial



The information provided in this brochure contains general descriptions to illustrate product characteristics and parameters. Conditions and protocol may differ from one location to another and may change with time. Customer is responsible for determining whether products and the information in this document are appropriate for customer's use. Scinor assumes no obligation or liability for the information provided in this document.