

# 74 SERIES

## Single Cartridge Housing

The **74 Series** single cartridge housing is available for elements up to 30" long. The plenum style configuration is ideally suited to both liquid and gas processes for pressures up to 10 bar g.

Mounted inline, this plenum styled housing will suit processes where there is a need to allow easy access to all internal areas, therefore assisting in the general cleanliness of the process system in which the filter is to operate.

Having no loose internal components ensures easy and fast clean down procedures.

The **74 Series** housing will accept the Single Open End Code 7 cartridge with nominal lengths of 5, 10, 20 and 30".

### Product Features

- Inline style construction with optional specification finish
- Cast Vee clamp closure for ease of access
- No loose internals for trouble free operation
- Easy drain plenum feature for gas applications
- PED and ATEX compliant
- CE Marked



## Features and Benefits

- Standard single open end cartridge fitting, using the Bayonet lock code 7 for forward and reverse flow
- 316L construction for maximum corrosion resistance.
- Every housing is etched with a serial number for full traceability.
- Wide range of options available for connection size and style, cartridge lengths and materials of construction
- Full certification available, PED and ATEX compliant, CE Marked

## Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



**AMAZON**

# 74 Series Technical Data

## Maximum Operating Conditions

Pressure Range: Liquid: FV / 10 bar g  
 Temperature Range: -10°C / 150°C

## Materials of Construction

Body and Closure: 316L St. Steel  
 Clamp: 304 St. Steel

## Finish

Vessel: Bead blast and electropolish

## Connections

Inlet/Outlet: 1½" Hygienic Coupling  
 Vent: ¼" BSPF  
 Drain: ¼" BSPF

Model	Dimensions					Volume (Litres)	Dry Weight
	A	B	C	D	E		
74011XF15N1GE	436	68	-	249	350	3.8	5.2
74012XF15N1GE	691	68	-	249	600	5.7	6.5

## PED Status:

Compliant 97/23/EC  
 Gas Group 2  
 Liquids Group 1 + 2  
 Marking: CE - 20" (Gas Group 2)  
 (SEP) Sound Engineering Practice - 10"  
 (Gas Group 2)


## Exceptions:

Group 1 liquids - Explosive

## ATEX:

Compliant 94/9/EC, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

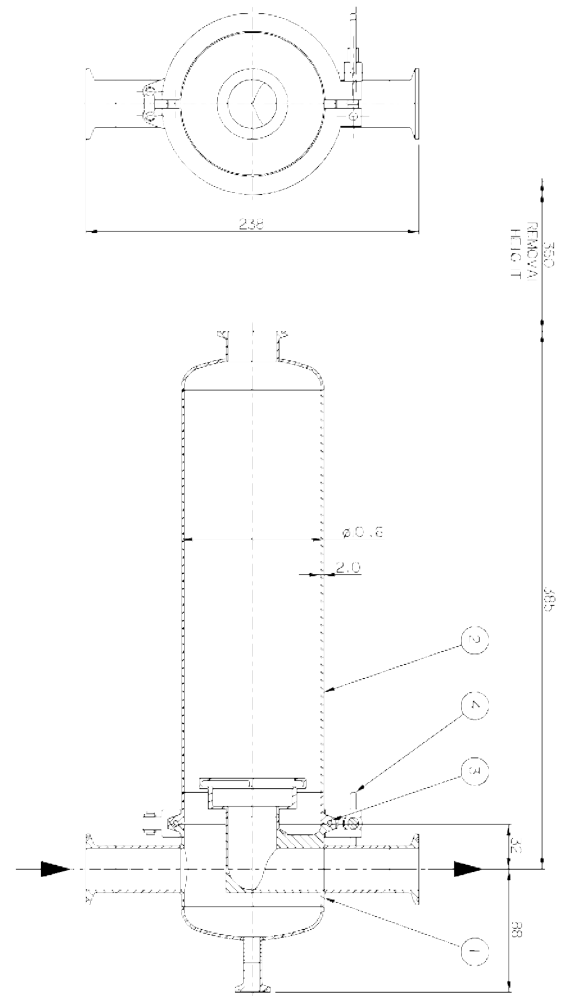

# Ordering Guide

7401	1	7	A	F	15	L	1	W	S
No of Stacks	Cartridge Length	Cartridge End Cap Style	Closure Style	Mounting	Connection	Connection Type	Materials	Finish	Seal
7401 - 1	0 - Single 5" 1 - Single 10" 2 - Double 20" 3 - Triple 30"	7 - Code 7	A - Cast vee clamp X - Screwed DIN locking ring and nut	F - ¼" BSPF vent/drain G - ¼" hygienic vent, ¼" BSP drain H - 1½" TC vent only, No Clamp/blank, ¼" BSP drain J - 1½" TC with ¼" Hygienic vent, No Clamp/blank, ¼" BSP drain R - ¼" Hygienic Staubli vent S - 1½" TC with ¼" Hygienic Staubli vent, No Clamp/blank	10 - 1" 15 - 1 ½" 20 - 2"	L - BS4825-3 Tri Clamp C - BS4504 Flange PN16 H - ANSI Flange 150#	1 - 316 st.st (L Grade)	W - 0.8Ra Clean Chamber, Bead Blast external P - 0.8Ra & Electropolish	S - Silicone T - PTFE Envelop V - Viton E - Ethylene Propylene F - FEP/Silicone G - FEP/Viton

Example: 740117AF15L1WS = 74 Series, 1 x 10" Code 7 cartridge, cast vee clamp, ¼" BSPF vent/drain, BS4825-3 Tri Clamp connections, St. Steel construction with 0.8Ra clean chamber and bead blast externally, silicone seal.

## AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD  
 CAMBERLEY, SURREY, GU16 7PG  
 ENGLAND

Tel. +44 (0) 1276 670600  
 Fax. +44 (0) 1276 670101  
 Email. sales@amazonfilters.co.uk  
 Web. www.amazonfilters.com

## Blue H2O Filtration Pty Ltd

The Filtration Specialists  
 +61 (03) 9564 7029

[www.bhftechnologies.com.au](http://www.bhftechnologies.com.au)

